


# TECWEIGH

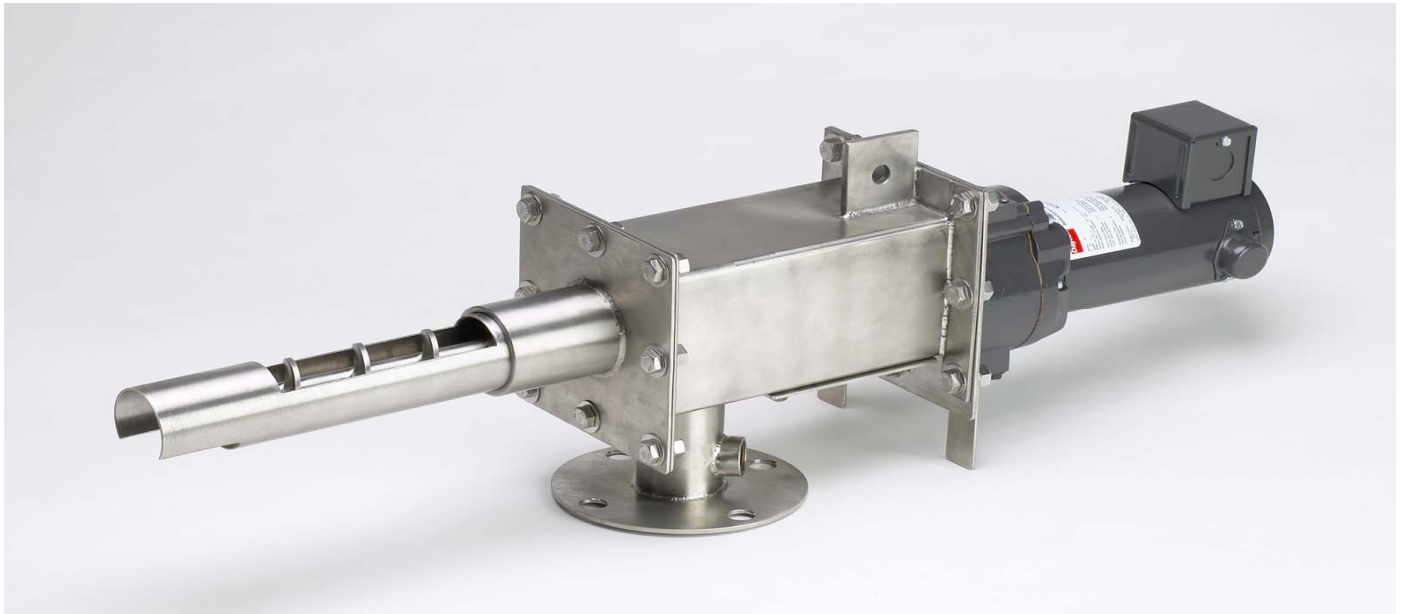

The screw sampler is used for sampling granular and powder materials from gravity flow locations including storage vessels and gravity down spouts. The sample is extracted by activating the electric gear motor. The sample tube captures material through a sampling slot. A standard control allows the operator to adjust the intake time for various sample quantities.